


\* Bituminous concrete binder and surface courses


# SECTION A-A

(TYPICAL 2 LANE WITH SHOULDERS)

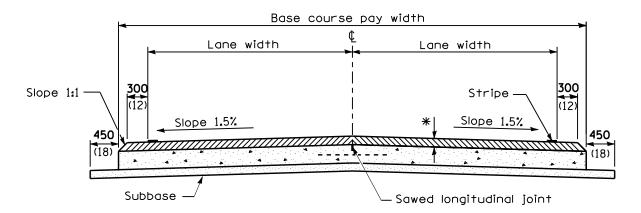


### ALTERNATE SECTION A-A (TYPICAL 2 LANE WITH SHOULDERS)

No. 19 (No. 6) Tie bars ∠Longitudinal sawed at **750** (30) cts. jọint PLAN

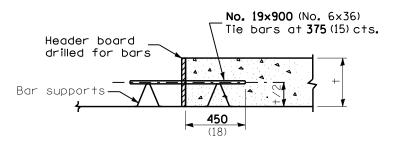

## TRANSVERSE CONSTRUCTION JOINT

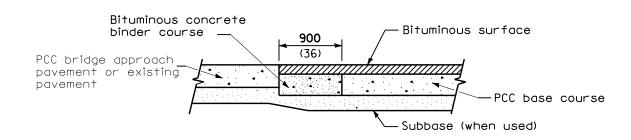

## LONGITUDINAL SECTION SHOWING CONSTRUCTION ADJACENT TO PCC BRIDGE APPROACH PAVEMENT OR EXISTING PAVEMENT

#### GENERAL NOTES

The longitudinal sawed joint shall be as detailed on Standard 420001 except the sawed groove does not require sealing.

All dimensions are in millimeters (inches) unless otherwise shown.

	DATE	REVISIONS	PCC BASE COURSE WITH
	8-1-05	Added bar supports	BITUMINOUS CONCRETE BINDER AND SURFACE COURSES
		to transverse constr.	
		joint detail.	
	1-1-04	Added Transverse	
		const. joint detail.	STANDARD 353001-02
Γ			

